


Energy Recovery Solutions for Low Pressure RO Systems

Making Potable Reuse Sustainable and Affordable

REDUCING ENERGY CONSUMPTION WITH THE PX® PRESSURE EXCHANGER®

Energy Recovery has spent 30 years perfecting the reliable, field-proven, and trusted PX Pressure Exchanger technology. Consuming no electrical power and engineered with only one moving part made of highly durable and corrosion-resistant ceramic, the PX Pressure Exchanger offers substantial energy savings and ease of integration resulting in reduced operational expenditures.

The PX Pressure Exchanger transfers hydraulic energy in the concentrated brine stream into hydraulic energy that supplements the flow from the main high-pressure feed pump which feeds the membranes. This is done via direct contact between the concentrated brine and filtered seawater feed stream. An optional booster pump can be used to balance the fluxes in both stages.

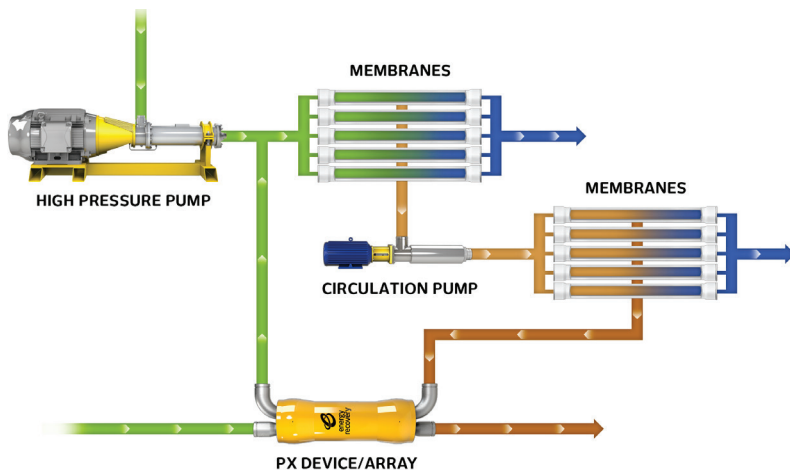

PX Technology BENEFITS

Reliable

- Industry-leading reliability (99.8% uptime)
- No scheduled maintenance with 25-year design life

Flexible

- Modular and scalable to any flow capacity
- Isobaric device with wide operating range
- High efficiency with flow and pressure variation

Affordable

- Short payback period: more energy efficient design for low pressure

Easy to Retrofit

- Potential to use in existing feed and booster pumps

FEATURES

- Operates at low pressures 5.5–27.6 bar (80–400 psi)
- Models ranging from 7m³/h to 59 m³/h (30 gpm to 260 gpm) per unit
- Ideal for potable, non-potable, agricultural, and industrial water reuse




Ready to learn more about how our energy recovery solutions can benefit your low pressure RO systems?

Contact us at wastewater@energyrecovery.com.

ENERGY SAVINGS & EASE OF INTEGRATION WITH TURBOCHARGERS

The LPT Turbocharger is a cost-efficient energy recovery solution offering long-term reliability and versatility in a compact footprint. Designed for low-pressure applications such as multi-stage brackish reverse osmosis water treatment, this device handles flows from 205 to 908 m³/h (900 to 4,000 gpm) and pressures up to 45 bar (650 psi). The LPT is the ideal solution for two-stage systems where flux balancing and system optimization are desired. It can easily replace a booster pump for this service, providing equal or better performance all while requiring no electrical connections, motors, or drives.

Turbochargers convert hydraulic energy in the brine stream into mechanical energy, reducing the amount of head required by the main high-pressure pump. The turbine drives the pump section boosting the discharge of the high-pressure pump to membrane feed pressure. The turbocharger decouples the energy recovery device from the pump and motor, allowing it to run at higher speeds and higher efficiency than the Pelton wheel.

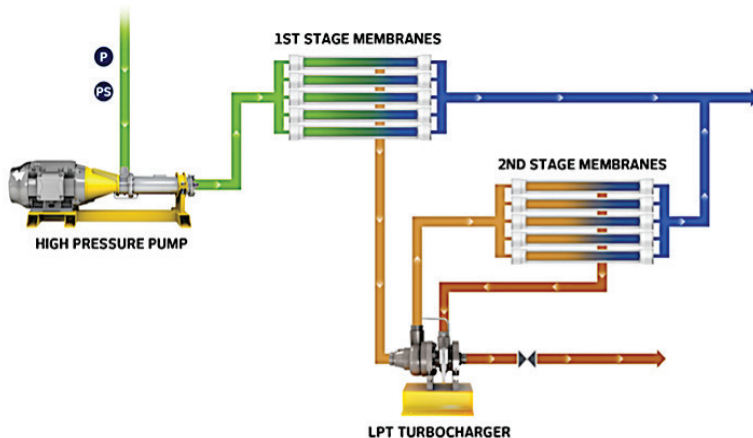

LPT Turbocharger BENEFITS


- Eliminates need for interstage booster pump
- No electrical connections
- Easy system integration
- Long-term reliability

FEATURES

- Flow range: 205 to 908 m³/h (900 to 4,000 gpm) per unit
- Operating pressure: up to 45 bar (650 psi)
- Ideal for brackish desalination and similar low fouling applications with stable recovery and flow rates



Energy Recovery (NASDAQ: ERII) is a trusted global leader in energy efficiency technology. Building on our pressure exchanger technology platform, we design and manufacture reliable, high-performance solutions that generate cost savings and increase energy efficiency across several industries. With a strong foundation in the desalination industry, Energy Recovery has delivered transformative solutions that optimize operations and provide positive environmental impact to our customers worldwide for more than 30 years. Headquartered in the San Francisco Bay Area, Energy Recovery has manufacturing and research and development facilities across California and Texas with sales and on-site technical support available globally. For more information, please visit www.energyrecovery.com.

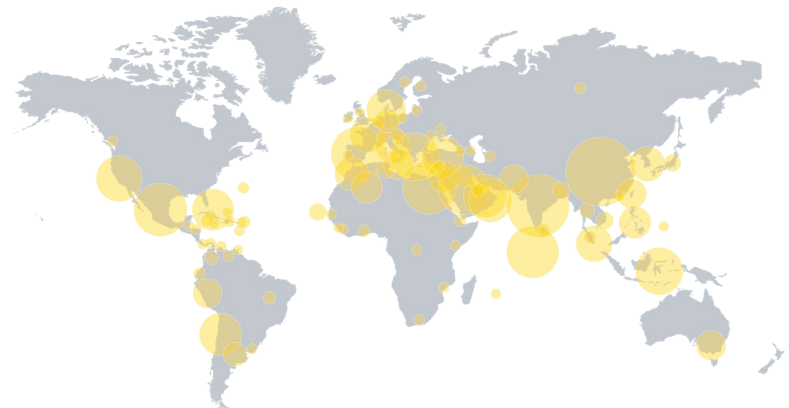

Ready to learn more about how our energy recovery solutions can benefit your low pressure RO systems?

Contact us at wastewater@energyrecovery.com.